



## GSDP / GSDPN Dimensional Information (inches)

Sizes from 1.000" - 3.500" are the CDPN™

Gland Choice CDPN™	ØA	ØB	C	D	E	ØF Min	ØF Min†	ØF Max	ØG Min	ØG Max	ØH Max	I	J	KMax*
1.000"	4.125"	2.375"	-	0.927"	1.625"	1.665"	1.937"	2.937"	3.625"	1/2"	1.209"	2.020"	0.040"	
1.125"	4.250"	2.375"	-	0.927"	1.750"	1.790"	2.062"	2.937"	3.750"	1/2"	1.209"	2.020"	0.040"	
1.250"	4.375"	2.500"	-	0.927"	1.875"	1.915"	2.187"	3.062"	3.875"	1/2"	1.209"	2.020"	0.040"	
1.375"	4.375"	2.625"	-	0.927"	2.000"	2.040"	2.312"	3.186"	3.875"	1/2"	1.209"	2.020"	0.040"	
1.500"	5.000"	2.832"	-	0.852"	2.250"	2.290"	2.500"	3.375"	4.500"	1/2"	1.090"	2.226"	0.040"	
1.625"	5.000"	2.832"	-	0.852"	2.375"	2.415"	2.500"	3.375"	4.500"	1/2"	1.090"	2.226"	0.040"	
1.750"	5.250"	3.022"	-	0.852"	2.500"	2.540"	2.750"	3.562"	4.750"	1/2"	1.090"	2.226"	0.040"	
1.875"	5.250"	3.022"	-	0.852"	2.625"	2.665"	2.750"	3.562"	4.750"	1/2"	1.090"	2.226"	0.040"	
2.000"	5.500"	3.386"	-	0.852"	2.750"	2.790"	3.000"	3.937"	5.000"	1/2"	1.150"	2.250"	0.040"	
2.125"	5.750"	3.687"	-	0.852"	2.875"	2.915"	3.312"	4.375"	5.125"	5/8"	1.150"	2.250"	0.040"	
2.250"	5.750"	3.687"	-	0.852"	3.000"	3.040"	3.312"	4.375"	5.125"	5/8"	1.150"	2.250"	0.040"	
2.375"	6.000"	3.937"	-	0.852"	3.125"	3.165"	3.562"	4.625"	5.375"	5/8"	1.150"	2.250"	0.040"	
2.500"	7.000"	4.312"	-	0.926"	3.375"	3.435"	3.875"	5.000"	6.375"	5/8"	1.250"	2.510"	0.060"	
2.625"	7.000"	4.312"	-	0.926"	3.500"	3.560"	3.875"	5.000"	6.375"	5/8"	1.250"	2.510"	0.060"	
2.750"	7.000"	4.312"	-	0.926"	3.625"	3.685"	3.875"	5.000"	6.375"	5/8"	1.250"	2.510"	0.060"	
2.875"	7.500"	4.937"	-	0.926"	3.750"	3.810"	4.500"	5.625"	6.812"	5/8"	1.250"	2.510"	0.060"	
3.000"	7.500"	4.937"	-	0.926"	3.875"	3.935"	4.500"	5.625"	6.812"	5/8"	1.250"	2.510"	0.060"	
3.125"	7.500"	4.937"	-	0.926"	4.000"	4.060"	4.500"	5.625"	6.812"	5/8"	1.250"	2.510"	0.060"	
3.250"	8.000"	5.312"	-	0.926"	4.125"	4.185"	4.875"	6.000"	7.312"	5/8"	1.250"	2.510"	0.060"	
3.375"	8.000"	5.312"	-	0.926"	4.250"	4.310"	4.875"	6.000"	7.312"	5/8"	1.250"	2.510"	0.060"	
3.500"	8.000"	5.312"	-	0.926"	4.375"	4.435"	4.875"	6.000"	7.312"	5/8"	1.250"	2.510"	0.060"	

sello mecánico cartucho doble, multiresorte para aplicaciones generales. se fabrica con conexiones de lavado, refrigeración y drenaje como modelo estándar.



cara de querer balanceado hidráulicamente para un menor consumo de energía.

diseño independiente de las caras del sello para mejorar el sellado tamaños disponibles desde 1.000" hasta 3.500" (24mm - 85mm) con bridas estándar y ansi plus

## GSDP / GSDPN - Dimensional Information (mm)

Sizes from 24mm - 85mm are the CDPN™

Gland Choice CDPN™	ØA	ØB	C	D	E	ØF Min	ØF Min†	ØF Max	ØG Min	ØG Max	ØH Max	I	J	KMax*
24	104.8	60.3	-	23.5	40.0	41.0	46.0	74.6	92.0	12	30.7	51.3	1.0	
25	104.8	60.3	-	23.5	41.0	42.0	49.2	74.6	92.0	12	30.7	51.3	1.0	
28	108.0	60.3	-	23.5	44.0	45.0	52.4	74.6	95.3	12	30.7	51.3	1.0	
30	111.0	63.5	-	23.5	46.0	47.0	55.6	77.8	98.4	12	30.7	51.3	1.0	
32	111.0	63.5	-	23.5	48.0	49.0	55.6	77.8	98.4	12	30.7	51.3	1.0	
33	111.0	63.5	-	23.5	49.0	50.0	55.6	77.8	98.4	12	30.7	51.3	1.0	
35	111.0	66.7	-	23.5	50.8	51.8	58.7	80.9	98.4	12	30.7	51.3	1.0	
38	127.0	71.9	-	21.6	57.2	58.2	63.5	85.7	114.3	12	27.7	56.5	1.0	
40	127.0	71.9	-	21.6	57.2	58.2	63.5	85.7	114.3	12	27.7	56.5	1.0	
43	127.0	71.9	-	21.6	60.3	61.3	63.5	85.7	114.3	12	27.7	56.5	1.0	
45	133.4	76.7	-	21.6	63.5	64.5	69.8	90.5	120.7	12	27.7	56.5	1.0	
48	133.4	76.7	-	21.6	66.7	67.7	69.8	90.5	120.7	12	27.7	56.5	1.0	
50	133.4	76.7	-	21.6	68.0	69.0	69.8	90.5	120.7	12	27.7	56.5	1.0	
53	139.7	86.0	-	21.6	71.0	72.0	76.2	100.0	127.0	12	29.2	57.2	1.0	
55	146.0	93.7	-	21.6	73.0	74.0	84.1	111.1	130.2	16	29.2	57.2	1.0	
58	146.0	93.7	-	21.6	76.2	77.2	84.1	111.1	130.2	16	29.2	57.2	1.0	
60	152.4	100.0	-	21.6	79.4	80.4	90.5	117.5	136.5	16	29.2	57.2	1.0	
63	177.8	109.5	-	23.5	85.7	87.2	98.4	127.0	161.9	16	31.8	63.8	1.5	
65	177.8	109.5	-	23.5	88.9	90.4	98.4	127.0	161.9	16	31.8	63.8	1.5	
70	177.8	109.5	-	23.5	92.1	93.6	98.4	127.0	161.9	16	31.8	63.8	1.5	
75	190.5	125.4	-	23.5	98.5	100.0	114.3	142.9	173.0	16	31.8	63.8	1.5	
80	190.5	125.4	-	23.5	101.6	103.1	114.3	142.9	173.0	16	31.8	63.8	1.5	
85	203.2	135.0	-	23.5	108.0	109.5	123.7	152.4	185.7	16	31.8	63.8	1.5	

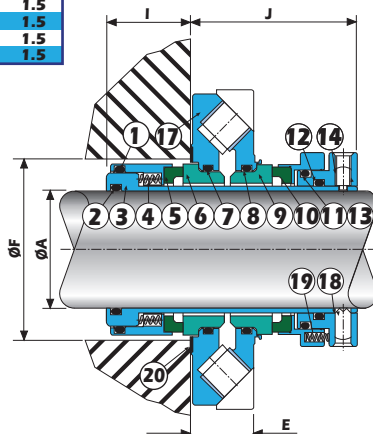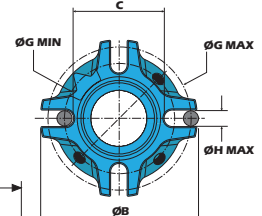

Item	Description	Material	Item	Description	Material
1	Rotary O' Ring	Viton/EPR/Kalrez/Aflas®	11	Drive Band O' Ring	Viton/EPR/Kalrez/Aflas®
2	Sleeve O' Ring	Viton/EPR/Kalrez/Aflas®	12	Clamp Ring O' Ring	Viton/EPR/Kalrez/Aflas®
3	Sleeve	316L Stainless Steel	13	Clamp Ring	316L Stainless Steel
4	Springs	Alloy 276	14	Anti-Tamper Screw	316 Stainless Steel
5	Inner Rotary Face	316L SS - Carbon / TC / SIC	15	Centering Clips	Brass
6	Inner Stationary Face	SIC / Ceramic † / TC / 316L Stainless Steel-Chr.Ox.*	16	Clip Screws	316 Stainless Steel
7	Stationary O' Ring	Viton/EPR/Kalrez/Aflas®	17	Gland	316 Stainless Steel
8	Stationary O' Ring	Viton/EPR/Kalrez/Aflas®	18	Drive Screws	316 Stainless Steel
9	Outer Stationary Face	SIC / Ceramic † / TC / 316L Stainless Steel-Chr.Ox.*	19	Springs	Alloy 276
10	Outer Rotary Face	316L SS - Carbon / TC / SIC	20	Gasket	AF1 / GFT